

IMPACT MODELLING OF EXPLOSION OF MIXTURE EXPLOSIVE
CHARGES ON THE ENVIRONMENT

N. Remez¹, A. Dychko¹, Y. Besarabets¹, S. Kraychuk²,
N. Ostapchuk², L. Yevtieieva¹

¹ National Technical University of Ukraine
“Igor Sikorsky Kyiv Polytechnic Institute”

37 Peremohy Ave., Kyiv, 03056, UKRAINE

² Rivne State University of Humanities
12 Stepana Bandery Str., Rivne, 33000, UKRAINE

The present paper provides the modelling of the explosion of the charges of the traditional (trotyl) and new blended explosive substances: polymix GR1/8 (74 %) + KRUK2 (26 %), compolite GS6, polymix GR4-T10. As a result of the research, it has been established that when using TNT a specific impulse is formed, which is by 40 % more than an explosion of new mixed explosives, and the safe distance from the source of the explosion of such explosives is increased by 25 %–50 %. On the basis of the established dependences of excess pressure, the specific impulse on the type and mass of charge, as well as the distance from the epicenter of the explosion, an engineering method has been developed for calculating dangerous parameters of the explosion impact on the environment.

Keywords: *air shock wave, compolite explosives, destructive action, environment, explosion, modelling*

1. INTRODUCTION

Due to an increase in volumes of mining operations and coming of quarry fields to protected ecosystems, there is a question about their safety regarding intense dynamic loads during the explosion of explosives (EX). However, blasting operations are characterised by a small coefficient of explosive energy use, an increase in the requirements of technological and environmental safety, and the economic inactivity of the use of expensive industrial EX. Therefore, in recent years several tens of new non-TNT EX mixtures have been developed. At the same time, conclusions about their technological efficiency and environmental safety are based on visual observation of experimental and practical results of explosions.

Special attention should also be devoted to the territory where, in addition to environmental problems inherent in production processes, there are other types

of hazards, for example, related to the carrying out military operations (bombing, explosives of military stockpiles of ammunition, mines, the use of phosphate mines, the destruction of infrastructure of settlements, etc.). Therefore, scientists urgently raise the issue of the safety of natural-technogenic environment in the spread of airborne shock waves.

In this regard, the study of parameters of airborne shock waves (ASW) affecting the protected ecosystems in the explosions of new blended EX, and prediction of the degree of damage of technogenic systems and living organisms represent actual scientific and practical tasks.

2. LITERATURE REVIEW AND PROBLEM STATEMENT

As it is known, the main parameters of the airborne shock wave (ASW), which determine its destructive and demaging effect, are excess pressure ΔP , Pa; speed pressure ΔP_s , Pa; specific pressure impulse I , Pa*s; time of shock wave action, τ_+ , ms.

Excess pressure at the front of the shock wave is the main parameter that determines the destructive force of the shock wave. This is the difference between the maximum P and the atmospheric pressure P_0 : $\Delta P = P - P_0$.

For the determination of excess pressure in engineering practice, various modifications of the empirical formula of M.A. Sadovsky [1], [2], used for charge of TNT, are widely implemented. For other explosives, the so-called energetic TNT-coefficient is used to determine the equivalence of the explosive. However, these formulas do not correspond to the theory of dimensions and similarity; therefore, their application can lead to unsatisfactory results.

The works of many scientists are devoted to the research into the definition and assessment of the impact of airborne shock waves. Most of the research focuses on the underground and terrestrial explosions and examines the damaging factors of a nuclear explosion. Methods for determining the individual parameters of the explosion and assessing their impressive impact on objects of the environment during the explosion are developed by Ya.M. Eisenberg, A.N. Birbaer, V.V. Boyko, O.O. Vovk, K.V. Yegupov, Yu.I. Kalyukh, M.A. Klyachko, S.V. Polyakov, Yu.I. Nemchinov, O.A. Savinov, A.E. Sargsyan, P.Z. Lugovoi, V.G. Kravets, V.S. Kukunaev, N.S. Remez, L.R. Stavnetsar, A.G. Tyapin, V.G. Bezdenkov, A.M. Trofimchuk, A.M. Uzdin, S.G. Shulman, N. Newmark, E. Rosenblueit and others.

The research of these scientists established such damaging for environment factors as funnel on the surface of the ground, the impact of the explosive shock wave, the seismic effect of the explosion on objects, the impact of the gas-dust cloud raised in the air during the explosion, thermal radiation, and the damaging effect of fragments and debris on security objects.

The studies of many scientists are devoted to the investigation of explosion damaging factors. Thus, in the publication [3], the estimation of the ASW action in an emergency explosion in the stock of ammunition is described, the main physical processes are described with the action of the ASW on surrounding objects, the basic parameters of the ASW are defined: excess pressure at the front of the ASW, impulse

of pressure at the compression phase, action of the ASW and a safe distance at shock wave action. Formulas and dependences obtained in the research can be adapted and used to study an explosion case, for example, a terrorist act.

In the work by Vadulina, Achyvakov and Sanimov [4], the main bases of human life insurance during the explosion of the pipeline are considered, the dependence of the conditional probability of human damage on the change in excess pressure of the shock wave of the explosion is studied. In the works [5]–[8], the influence of explosive lesions on the human organism is examined during technogenic catastrophes and terrorist acts.

The research by Chernozubenko, Kuprinenk and Bisik [9] provides the analysis of the damage factors on the human body after the explosion for the possibility of providing a complex system of personal protection. The distribution of injuries of body parts of military personnel during an explosion have been graphically depicted. The damage factors of the blow-ups of the explosive device have been considered, such as primary (fragments of an explosive device and a shock wave) and secondary factors (personnel fall from equipment, damage by buildings and structures, stress and heart attacks).

Study [10] helped establish the mechanogenesis of the impact of the damage factors of explosive devices on the human body. The results of the analysis showed that the main types of damage were injuries of the lower extremities, internal organs, and head.

Kryuchkova, Arzhavkina and Zhekalov in their research [11] presented the results of studying the dynamics of physical work ability and behavioral reactions of white rats at different intervals of the first day after the damage by the air shock wave of light and medium severity.

In the works by Luchko, Remez, Vorobiov, new types of EX were described [12]–[15]. The authors also compared different variants of charging pores and argued about the perspective use of these EX. However, the issue of the impact of air shock waves of new blended EX remains open.

3. NUMERICAL MODELLING

The goal of the research is the theoretical substantiation of the parameters of air shock waves during explosions of charges of traditional and new blended EX to predict their destructive effect on the environment.

To achieve the goal, the following objectives are set:

- to carry out mathematical modelling of the process of propagation of air shock waves during explosions and their interaction with natural-technogenic ecosystems;
- to establish the mathematical dependences of parameters of air shock waves on the type and mass of the explosive and the distance from the source in order to calculate their effect on living organisms.

An explosion of the spherical charge of EX in the air is considered. The motion of detonation products and air is described by a system of differential equations that determine the laws of conservation of the amount of motion, mass and impulse [2]:

$$\frac{\partial u}{\partial t} + u \frac{\partial u}{\partial r} + \frac{1}{\rho} \frac{\partial p}{\partial r} = 0, \quad (1)$$

$$\frac{\partial \ln \rho}{\partial t} + u \frac{\partial \ln \rho}{\partial r} + \frac{\partial u}{\partial r} + \frac{Nu}{r} = 0, \quad (2)$$

$$\frac{\partial (p/\rho^\gamma)}{\partial t} + u \frac{\partial (p/\rho^\gamma)}{\partial r} = 0, \quad (3)$$

where r – coordinate, u – speed, p – pressure; t – moment of time; γ – isentropic index; ρ – density.

Expansion of detonation products takes place according to binomial isentropy [2]:

$$P = A\rho^N + B\rho^{\gamma+1}. \quad (4)$$

Constants in equation (2) characterise this type of EX. The initial conditions of this task are:

$$u = 0, p = p_n, \rho = \rho_n \text{ at } 0 \leq r < r_0, \quad (5)$$

$$u = 0, p = 0, \rho = \rho_0 \text{ at } r_0 \leq r, \quad (6)$$

where r_0 – charge radius, p_n, ρ_n – pressure and density of detonation products in the explosion, ρ_0 – density of air.

The boundary conditions are as follows: 1) the condition of continuity of speed u and pressure on the moving contact boundary “products of detonation – air”; 2) the condition of “non-penetration” – the speed on the charge axis is zero. For the approximation of the system of differential equations (1)–(3) with the corresponding initial and boundary conditions, the method of finite differences was used based on the finite-difference scheme of the type “cross” [39] of the second order of accuracy in spatial and temporal coordinates.

To calculate the effect of traditional and new blended explosives on the shock wave parameters, the following EX are studied: trotyl, polymyx GR1/8 (74%)+KRUK2 (26%), compolite GS6, polymix GR4-T10 (Table 1).

Parameters of Explosion of TNT and New Blended EX

No.	EX	Parameters						
		p_n , GPa	Q , KJ/kg	γ	ρ_0 , kg/m ³	A	B·10 ⁻⁵	N
1	Trotyl	9.8	4184	1.25	1600			3.12
2	Polymyx GR1/8	4.54	3355.7	1.242	1000	59.35	0.604	2.48
3	Compolite GS6	1.75	3919.7	1.235	852	7.671	1.638	2.24
4	Polymix GR4-T10	2.71	3864.4	1.245	872	5.67	1.279	2.73

As a result of the numerical solution to the problem, graphic functional dependences of the change of excess pressure on the distances of the spread path for different charge radii of different types of EX were obtained. For example, in Fig. 1 $r_0 = 0.2$ m.

As a result of the calculations, it is clear that the excess pressure of the air shock wave formed during the explosion of a traditional explosive substance – TNT – is much larger than during the explosion of new blended explosives. At a distance of the air-shock wave spread in 1 m in the explosion of charges with a radius of 0.1 m and 0.2 m, the excess pressure for TNT is by 2 times greater than for new blended EX. At a distance of 1.5 m and 2 m, the difference is reduced to 90 %–75 %. At a distance of 5 m from the epicenter of the explosion, the excess pressures are almost the same. This is due to the fact that in the near area of explosion, TNT has significantly larger parameters of the explosion (pressure, density, heat of radiation, etc.), but with an increase in the distance from the explosive cavity the waves formed by the explosion of TNT expire considerably more intensively than from blended EX because in the explosion of the charges of TNT the energy losses at the front of the shock wave are much higher.


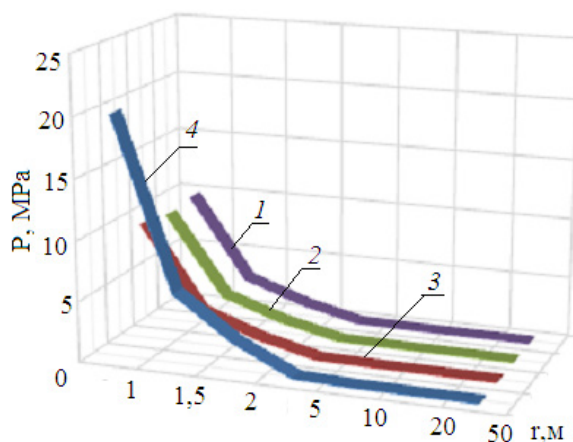


Fig. 1. Dependence of the change in excess pressure of the air shock wave on the explosion centre at $r_0 = 0.2$ m: 1 – polymyx GR1/8; 2 – compolite; 3 – polymyx GR4-T10; 4 – TNT.


From this we can conclude that in the distant zone of the explosion, the parameters of air shock waves are weakly dependent on the type of EX, and are determined by the mass of charge.

Thus, it can be stated that a traditional explosive substance, such as TNT, forms a stronger excess pressure during the explosion, and therefore the force of destruction of surrounding objects is higher than in new blended explosives. The application of the polymix GR4-T10, the compolite GS6 and the polymix GR1/8 (74 %) + KRUK2 (26 %) during blasting works is safer in terms of excess pressure formation.

After comparing the explosion of charges of traditional and new blended EX charges with excess pressure at the shock wave front, an impulse for the same explosives was calculated. As an example, Fig. 2 shows the dependence of the impulse on excess pressure during the explosion of charges of polymyx GR4-T10 with different radii.

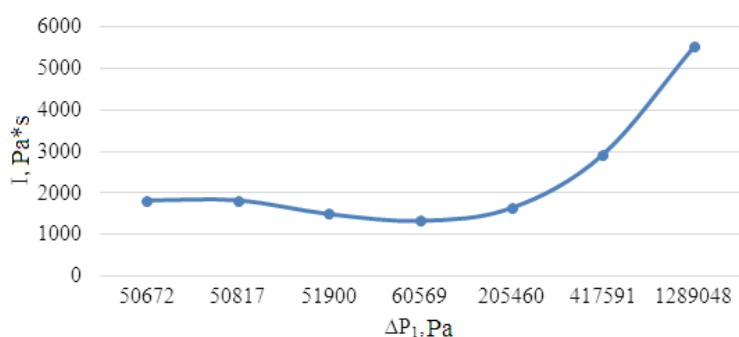

a)

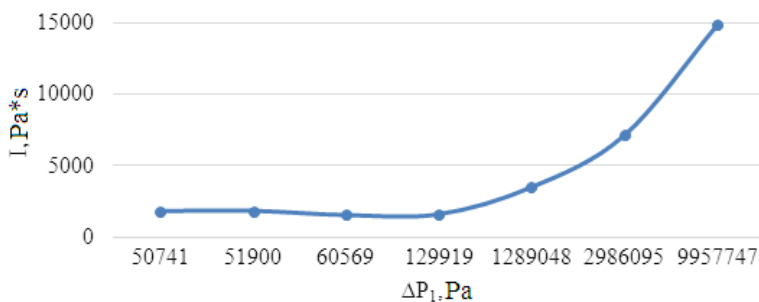

b)

Fig. 2. Dependence of the impulse from the excess pressure in the explosion of charges of polymix GR4-T10 with different radii: a) at $r_0 = 0.1$ m; b) $r_0 = 0.2$ m

As a result of calculations and graphic representation of the dependence of the impulse on excess pressure, it is evident that with an increase in excess pressure the impulse of the air shock wave increases. Impulse of the air shock wave formed during the explosion of a traditional explosive – TNT – is more by 40 % than during the explosion of new blended explosives for all investigated charge radii at a distance of 1 m from the epicenter of the explosion. At a distance of 1.5 m and 2 m, this difference is 30 % and 20 %, respectively. At a distance of 5 m, the value of the

impulse is almost the same for charges with radii of 0.1 m and 0.2 m, but for a charge with a radius of 1 m – at a distance from the epicenter of the explosion from 1.5 m to 20 m, the difference is 40 %, and from 20 m – 20 %.

Consequently, a traditional explosive substance, such as TNT, forms a stronger impulse during the explosion, and therefore the force of destruction of surrounding objects is higher than in new blended explosives. The application of the polymix GR4-T10, the compolite GS6 and the polymix GR1/8 (74 %) + KRUK2 (26 %) during blasting works is safer from the point of view of impulse formation.

Table 2 presents the results of calculations of the dependence of the degree of damage to people during the explosion of TNT and new blended EX on the distance of the spread of an explosive wave for different charge radii.

From Table 2, it can be concluded that the use of such a traditional explosive like TNT is more dangerous to human health than the use of new blended explosives, as, for example, the death of people as a result of direct exposure to ASW from the time of the explosion of EX with $r_0 = 0.1$ m at an excess pressure of 190 KPa for TNT will take place at a distance of 2.5–3 m, and during the explosion of new blended EX – at a distance of 3 m–3.5 m.

Table 2

The Degree of Damage to People in the Explosion of Different EX

Degree of damage	$\Delta P, Pa$	Spread of an explosive wave, r_{II}, m (*)		
		$r_0 = 0.1m$	$r_0 = 0.2m$	$r_0 = 1m$
Death of people as a direct effect of ASW	190000	<u>2.5-3</u>	<u>5-6</u>	<u>25-31.5</u>
Death of people under the ruins of buildings		3-3.5	5.5-6.8	47-48
Death of people as a result of smite from solid objects				
Serious damage as a result of ASW action	69000-76000	<u>4.5-6</u>	<u>9.5-10.5</u>	<u>49.5-50.5</u>
Serious damage when the building collapses or the body moves by an explosive wave		4.7-7.8	7.3-8.5	more than 50
Serious damage as a result of eardrums and lungs under action of an explosive wave	55000	<u>8-9</u>	<u>16-16.5</u>	more than 50
Defeat by fragments and ruins of the building		10-11	more than 50	
Defeat by fragments and ruins of the building. Probability of rupture of drum chambers 10 %	24000	more than 50	more than 50	more than 50
Temporary loss of hearing or injuries as a result of secondary effects of an explosive wave (collapse of the building and body transference)	16000	more than 50	more than 50	more than 50
Fatal or serious damage from direct exposure of an explosive wave is unlikely				
Injuries associated with the destruction of glass and damage to the walls of the building	5900–8300	more than 50	more than 50	more than 50

* The numerator contains data for the TNT, in the denominator – for new compound substances.

In work [63] with the experimental data, the degree of contusions (DC) in dogs caused by the action of air shock waves was analyzed, which came with the following values of maximum and average pressure. At the same time, the authors proposed the use of parameter $P_{cp} = I_{y0} / t$, equal to the ratio of the specific impulse to the time of action of the ASW because the spread of experimental data is much smaller than for P_{max} . In order to assess the damage of people in the explosion of EX, in emergencies or terrorist acts, it is important to assess the likelihood of getting a damage from the ASW and the degree of contusion, and the most acceptable is the class of parametric laws of damage (PLD) using the Weibull-Gnedenko distribution. To solve this problem, the recalculation of the degree of concussion at certain parameters of air shock waves was performed in the research.

For practical application of theoretical results of the spread of ASW and their effects on environment, the method of calculating the safe parameters of the explosion was developed.

To construct the dependence of P_{cp} from the relative distance $\bar{r} = \sqrt[3]{m} / r$, calculations were carried out, for example, for TNT they are given in Table 3.

Table 3

Dependence of the Pressure on the Relative Distance for TNT

r, m	$\sqrt[3]{m} / r$			$\Delta P_{cp}, P_a$		
	m=6.7kg	m=13.4kg	m=6702kg	m=6.7kg	m=13.4kg	m=6702kg
1	1.885	2.375	18.848	$2.6 \cdot 10^6$	$20.13 \cdot 10^6$	$2.5 \cdot 10^9$
1.5	1.26	1.58	10.57	$0.8 \cdot 10^6$	$6 \cdot 10^6$	$7.44 \cdot 10^8$
2	0.943	1.188	9.424	$0.36 \cdot 10^6$	$2.6 \cdot 10^6$	$3.14 \cdot 10^8$
5	0.38	0.48	3.77	$70.7 \cdot 10^3$	$211 \cdot 10^3$	$2 \cdot 10^7$
10	0.19	0.24	1.9	$53 \cdot 10^3$	$60.7 \cdot 10^3$	$2.56 \cdot 10^6$
20	0.095	0.12	0.95	$50.9 \cdot 10^3$	$53.2 \cdot 10^3$	$0.36 \cdot 10^6$

On the basis of the established dependences of excess pressure, specific impulse from the type and mass of EX, as well as the distance from the source of the explosion, a nomogram to determine the distances or masses of EX, safe for living organisms was built (Fig. 3): 1 – trotyl, 2 – polymix GR1/8 (74 %) + KRUK2 (26 %), 3 – the compolite GS6, 4 – the polymix GR4-T10. The following degrees of concussion are marked: 1 – light, 2 – medium, 3 – hard, 4 – difficult edge, 5 – death.

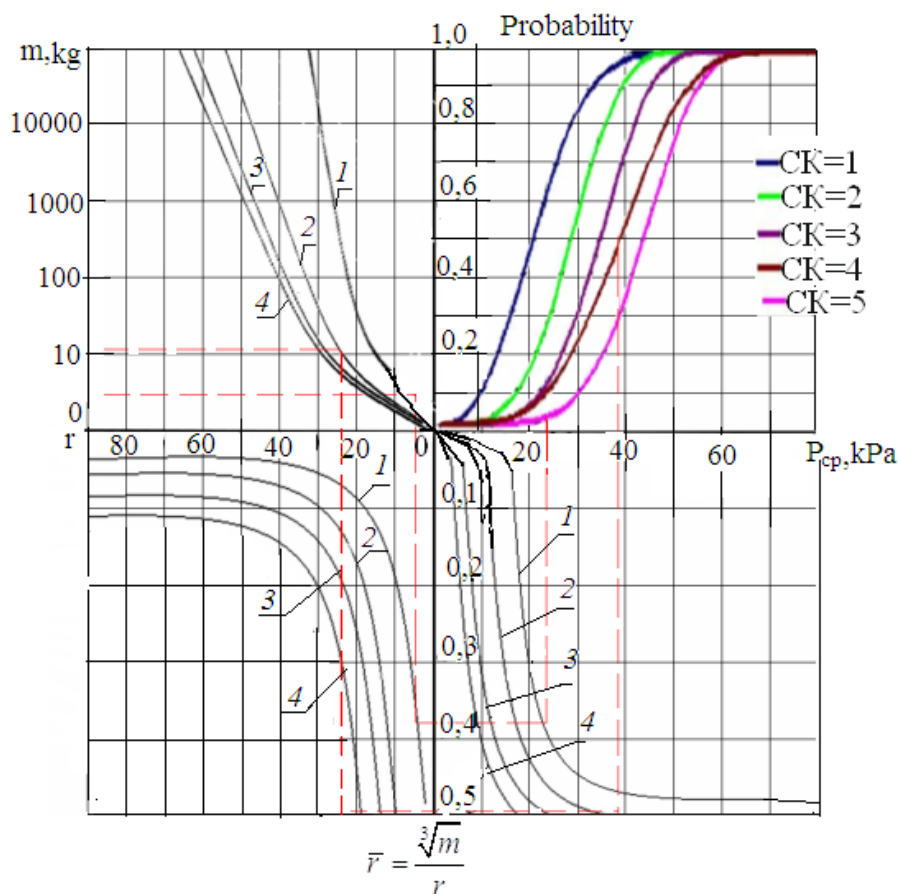


Fig. 3. Nomogram to determine the safe parameters of explosion of different EX for dogs, rabbits, pigs: 1 – trotyl, 2 – polymix GR1/8 (74 %) + KRUK2 (26 %), 3 – the compolite GS6, 4 – the polymix GR4-T10.

Figure 4 presents nomograms for determining the safe parameters of explosion for people in the explosion of charges of different types of EX. Numbering of curves in Fig. 4 corresponds to the numbering of Fig. 2.

4. RESULTS AND DISCUSSION

As it is known, the main parameters of the air shock wave, which determine its destructive and striking effect, are excess pressure, speed pressure, specific impulse of pressure and action time of the positive phase of the shock wave.

Today, new non-TNT blended EX, the technical and economic efficiency of which is proven, become a widespread practice. However, there is no theoretical substantiation of the environmental safety of the use of these EX and the interaction of airborne explosive waves during explosive operations with elements of ecosystems.

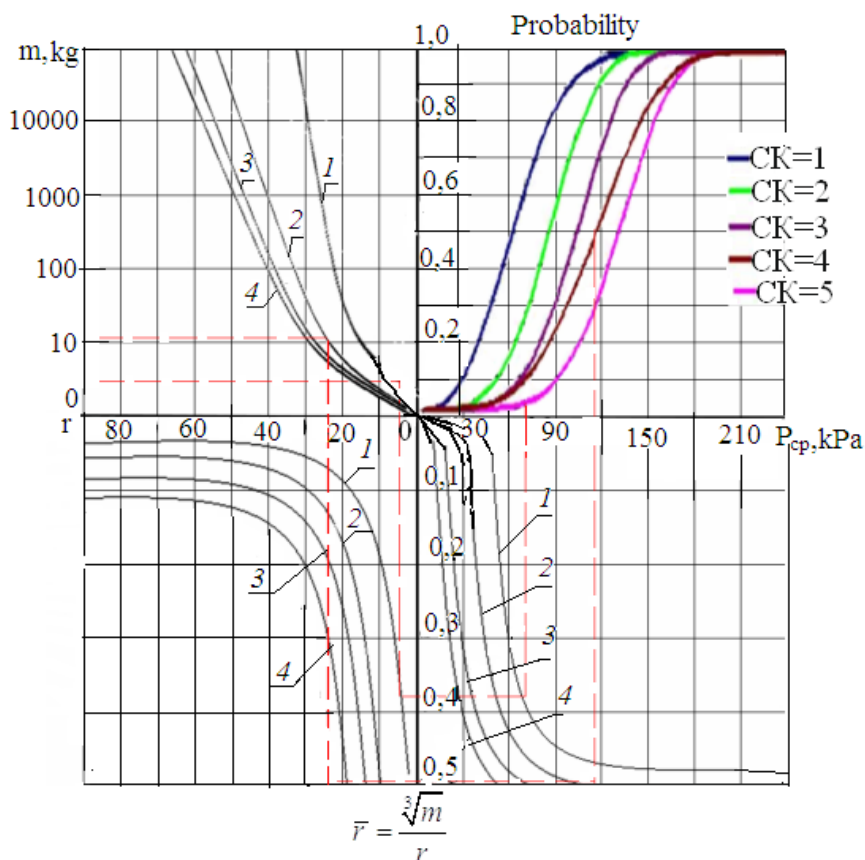


Fig. 4. Nomogram to determine the safe parameters of explosion of different EX for people:
 1 – trotyl, 2 – polymix GR1/8 (74 %) + KRUK2 (26 %), 3 – the compolite GS6,
 4 – the polymix GR4-T10.

On the basis of mathematical modelling, the research investigates the dependence of the change in parameters of air airborne explosive waves on the mass of charge of explosive at different distances from the epicenter of the explosion. For a charge weighting 10 kg, the following dependences for the ASW parameters are established, i.e., for the TNT: excess pressure $y = 9901.3x^{0.7034}$, pressure of the speed through $y = 423.12x^{1.301}$, specific impulse $y = 0.63x^{0.6667}$, action time of the positive phase of the wave $y = 4.6171x^{0.1667}$; for the polymix GR4-T10: excess pressure $y = 7932.4x^{0.647}$, pressure of the speed through $y = 250.87x^{1.2262}$; for the compolite GS6: excess pressure $y = 7932.4x^{0.647}$, pressure of the speed through $y = 250.87x^{1.2262}$; for the polymix GR1/8 (74 %) + KRUK2 (26 %): excess pressure $y = 7457.5x^{0.636}$, pressure of the speed through $y = 218.73x^{1.211}$.

For a charge weighting 50 kg, the following dependences for the ASW parameters are established, i.e., for the TNT: excess pressure $y = 4 \cdot 10^6 x^{-1.535}$, pressure of the speed through $y = 5 \cdot 10^7 x^{-3.005}$, specific impulse $y = 85.545x^{-1}$, action time of the positive phase of the wave $y = 2.8025x^{-0.5}$; for the polymix GR4-T10: excess pressure $y = 2 \cdot 10^6 x^{-1.424}$, pressure of the speed through $y = 1 \cdot 10^7 x^{-2.803}$; for the compolite GS6: excess pressure $y = 2 \cdot 10^6 x^{-1.426}$, pressure of the speed through $y = 1 \cdot 10^7 x^{-2.806}$; for the

polymix GR1/8 (74 %) + KRUK2 (26 %): excess pressure $y = 2 \cdot 10^6 x^{-1.407}$, pressure of the speed through $y = 1 \cdot 10^7 x^{-2.772}$.

Based on the comparison of the calculated results and the degree of damage we have, the use of an explosive such as TNT is more dangerous to human health than the use of new blended explosives because, for example, the death of people as a result of direct influence of ASW in explosion of EX with 0.1 m at an excess pressure of 190 KPa for TNT takes place at a distance of 2.5 m–3 m, while during the explosion of new blended EX – at a distance of 3 m–3.5 m.

Based on the established dependences of excess pressure, specific impulse from the type and mass of charge of EX, as well as the distance from the epicenter of the explosion, an engineering method was developed for calculating the dangerous parameters of the explosion on the environment.

5. CONCLUSIONS

1. The effective calculation method based on numerical simulation of the explosion of spherical charges of traditional and new explosives in the air has been developed, which allows obtaining the parameters of airborne shock waves, depending on time, distance, mass of charge and type of EX.
2. Based on the mathematical modelling of the spread of airborne shock waves and their interaction with natural-technogenic environment, the influence of traditional and new blended explosives on the parameters of ASW has been studied. As a result of numerical calculations, it has been established that during the explosion of charges of traditional EX (trotyl), a stronger excess pressure (by an average 85 %) than in the new blended EX is formed. Consequently, the use of the polymix GR4-T10, compolite GS6 and polymix GR1/8 (74 %) + KRUK2 (26 %) during blasting works is safer in terms of excess pressure formation.
3. The functional (degree) dependences of excess pressure on the distance of the source of the explosion and the charge and impulse mass on the excess pressure and the charge radius for different types of EX have been determined.
4. It has been established that with an increase in excess pressure, the impulse of the airborne shock wave increases. When using TNT, a specific impulse is generated, which is much stronger (by 40 %) than that of blasting new blended explosives.
5. It has been established that the destructive and damaging effect of the explosion charge of TNT is much greater than of the new blended EX. The safe distance from the source of the explosion of such charges increases by 25 %–50 %.
6. The engineering methodology has been developed for calculating the dangerous parameters of the explosion on the environment based on the established dependences of excess pressure, specific impulse on the type and mass of charge of EX, as well as the distance from the epicenter of the explosion.

REFERENCES

1. Sadovsky, M.A. (1952). *The Mechanical Action of Air Shock Waves of Explosion According to Experimental Studies: Physics of Explosion*. Moscow: Publishing of Academy of Sciences of the USSR.
2. Baum, F.A., Orlenko, L.P., Stanyukovich, K.P., Chelyshev, V.P., & Schechter, B.I. (1975). *Physics of the Explosion*. Moscow: Science.
3. Sidorenko, V.L., & Azarov, S.I. (2008). Calculation of the effects of explosive shock waves on a person during an explosion in the stock of ammunition. *Systems of Armament and Military Equipment, 1*, 70–73.
4. Vadulina, N.V., Achivakova, L.R., Salimov, A.O., Abdrakhmanova, K.N., & Abdullin R.S. (2017). Insuring safety pneumatest of the pipeline. *Oil and Gas Business, 4*, 109–124. DOI: <http://dx.doi.org/10.17122/ogbus-2017-4-109-124>
5. Minnullin, I.P., Fomin, N.F., & Nechaev, E.A. (2010). Mine-explosive defeats – the global problem of humanity. *Medicine of Catastrophes, 2*, 34–36.
6. Shapovalov, V.M., & Samokhvalov, I.M. (2012). Explosive injuries due to man-made disasters and terrorist acts. *War-Medical Journal, 1*, 25–33.
7. Kaptsov, V.A., Kulbacinskiy, V.V., Bazaz'yan, A.G., Romanov, V.V., & Semenchukov, A.V. (2010). Probable injuries and specifics of preparedness planning for and management of acts of terrorism on railways. *Medicine of Catastrophes, 1*, 15–18.
8. Shapovalov, V.M., Samokhvalov, I.M., & Lytaev, S.A. (2012). Amazing factors, mechano-pathogenesis, clinical manifestations of explosive damage of peacetime. *Quality Management in the Sphere of Health Care and Social Development, 3*, 46–51.
9. Chernozubenko A.V., Kuprinenko, A.N., & Bisyk, S.P. (2014). Study of damaging factors sap mine explosive devices on the human body. *Systems of Armament and Military Equipment, 2*, 39–44.
10. Ivanitski, A., & Petriko, H. (2014). Assessment of consequences of impact of emergency explosion of fuel-air mixture on a person. *Bulletin of the Command-Engineering Institute of the Ministry of Emergencies of the Republic of Belarus, 1*(19), 67–72.
11. Kriuchkova, A.S., Arzhavkina, L.G., Zhekalov, A.N., Protasov, O.V., & Chernyavskiy, E.A. (2015). Influence of blast wind injury of minor and medium severity on physical efficiency and behavioral reactions in animals. *Herald of the Russian Military Medical Academy, 1*(49), 169–172.
12. Luchko, I.A., Remez, N.S., & Luchko, A.I. (2010). Wave processes in soil massifs during explosions of new blended explosives. *Bulletin of NTUU "KPI". Series "Mining", 19*, 24–25.
13. Luchko, I.A., Remez, N.S., & Luchko, A.I. (2011). Mathematical modeling of the explosion in soils and rocks. Kyiv: NTUU "KPI".
14. Remez, N.S., Luchko, I.A., & Luchko, A.I. (2006). Efficiency of application of new non-destructive explosives at consolidation of soil bases. *SRI of Building Constructions, 64*, 296–301.
15. Vorobiov, V.D., & Tverda, O.Y. (2012). Justification of the criterion for selecting a safe and effective type of explosives in mass explosions in quarries. *Problems of Labor Protection in Ukraine, 22*, 56–64.
16. Remez, N., Dychko, A., Kraychuk, S., Ostapchuk, N., & Yevtieieva, L. (2018). Simulation of seismic explosion waves with underground pipe interaction. *Journal of Physics and Engineering, 3*, 27–33. DOI: <http://dx.doi.org/10.2478/lpts-2018-0011>

17. Remez, N., Dychko, A., & Yevtieieva, L. (2018). Stress-deformed state of soil at the explosion of cylindrical charge of new industrial mixed explosives. *Development of Scientific Foundations of Resource-Saving Technologies of Mineral Mining and Processing* (pp. 105–125). Sofia: Publishing House St.Ivan Rilski.
18. Remez, N., Dychko, A., Kraychuk, S., & Ostapchuk, N. (2018). Interaction of seismicexplosive waves with underground and surface structures. *Resources and Resource-Saving Technologies in Mineral Mining and Processing* (pp. 291–310). Petroșani, Romania: UNIVERSITAS Publishing.
19. Isayenko, V.M., Vovk, O.O., Zaychenko, S.V., Remez N.S., & Vovk, O.O. (2018). *Methods of Forecasting and Monitoring of Technogenic Dynamic Processes in the Extraterritorial Territories*. Kyiv: NAU.
20. Guselskikov, Y.O., Vylokhin, S.A., & Ponikarov, S.I. (2014). Study of effective parameters of an air shock wave. *Bulletin of the Kazan Technological University*, 9, 81–83.

SPRĀDZIENBĪSTAMU MAISIĀJUMU SPRĀDZIENA IETEKMES MODELĒŠANA UZ VIDĪ

N. Remezs, A. Dičko, J. Besarabets, S. Kraičuks,
N. Ostapčuks, L. Jevtejeva

K o p s a v i l k u m s

Rakstā aprakstīta tradicionālo (trotils) un jauno sajaukto sprāgstvielu lādiņu eksplozijas modelēšana: polimiks GR1/8 (74 %) + KRUK2 (26 %), kompolīts GS6, polimiks GR4-T10. Pētījuma rezultātā tika konstatēts, ka, izmantojot TNT, veidojas īpašs impulss, kas ir par 40 % lielāks nekā jaunu jauktu sprāgstvielu sprādziens, un drošais attālums no šādu sprāgstvielu sprādziena avota tiek palielināts par 25% – 50%. Pamatojoties uz konstatētajām pārspiediena atkarībām, īpašo impulsu uz lādiņa veidu un masu, kā arī attālumu no sprādziena epicentra tika izstrādāta inženiertehniskā metode, lai aprēķinātu sprādzienbīstamu parametru ietekmi uz vidi.

12.02.2019.